


SM - BLACK STEAM HOSE

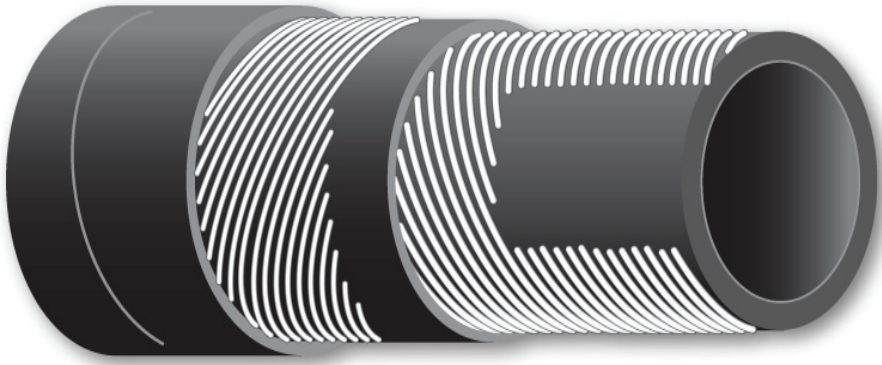

TECHNICAL CHARACTERISTICS

SPECIFICATION: BS5122/2

APPLICATION: For use with saturated steam up to +170 degrees C

TUBE: Black EPDM rubber resistant to steam up to +170 degrees C







REINFORCEMENT: Polyester Yarn fabrics

COVER: Black, abrasion, steam, heat, ozone and weather resistant EPDM rubber

TEMPERATURE RANGE: -40 degrees C to +170 degrees C

SAFETY FACTOR: 10:1

BRANDING: W=STEAM 100 P.S.I SAFE WORKING PRESSUURE (7 BAR) 170°C (338 °F) BS 5122/A2 DRAIN AFTER USE

	I.D	O.D	W.P	W.P	BR	COIL LENGTH
						
Inch	mm	mm	BAR	PSI	mm	mt
1/2"	13	24	7	102	130	40
5/8"	16	28	7	102	160	40
3/4"	19	31	7	102	190	40
1"	25	38	7	102	250	40
1 1/4"	32	46	7	102	320	40
1 1/2"	38	52	7	102	380	40
2"	50.8	65	7	102	510	40