


WRSD - WIRE REINFORCED CLEAR PVC

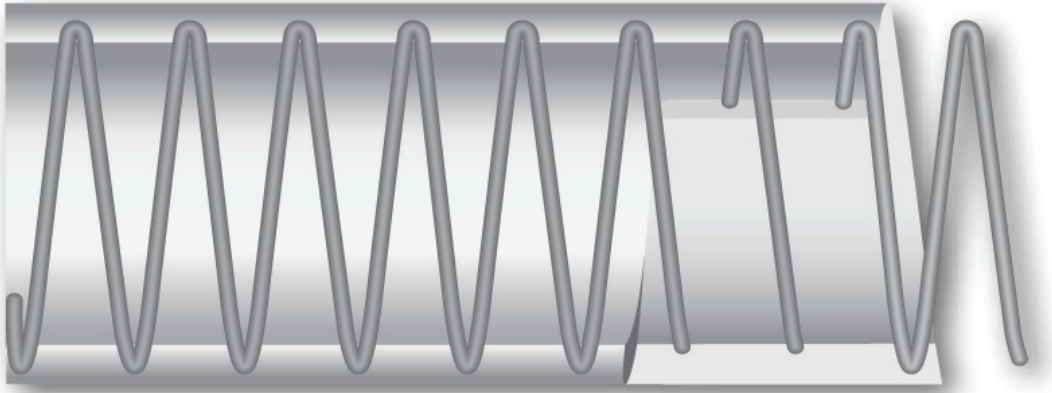

TECHNICAL CHARACTERISTICS

SPECIFICATION: N/A

APPLICATION: Suction and delivery of water, slurries and dilute chemicals

TUBE: Translucent clear PVC







REINFORCEMENT: Helical steel wire

COVER: Translucent clear PVC

TEMPERATURE RANGE: -20 degrees C to +65 degrees C

SAFETY FACTOR: 3:1

BRANDING: W=NON TOXIC SUCTION & DELIVERY HOSE ID X OD W/P BAR Qtr/Yr

						
Inch	mm	mm	BAR	PSI	mm	mt
1/2"	13	19	10	145	2XDI	30/10
3/4"	19	26	9	135	2XDI	30/10
1"	25	33	8	120	2XDI	30/10
1 1/4"	32	42	7.5	112	2.5XDI	30/10
1 1/2"	38	49	7.5	112	2.5XDI	30/10
2"	51	65	6	90	2.5XDI	30
2 1/2"	63	77	4.5	67	2.5XDI	30
3"	76	92	4	60	3XDI	30
4"	102	118	3	45	-	30