


# SRM - RED STEAM HOSE

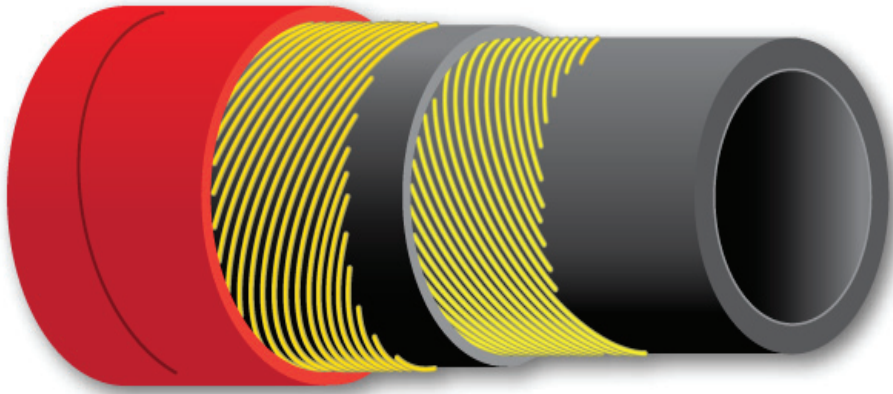

## TECHNICAL CHARACTERISTICS

**SPECIFICATION:** BS EN ISO 6134:2017 (BS 5342/2)

**APPLICATION:** For conveying saturated steam and superheated water continually at up to +235 degrees C

**TUBE:** Black EPDM rubber (steam resistant)







**REINFORCEMENT:** Layers of high strength brass coated steel wire

**COVER:** Red

**TEMPERATURE RANGE:** -40 degrees C to +235 degrees C

**SAFETY FACTOR:** 10:1

**BRANDING:** W=STEAM 250 PSI 17 BAR BS 5342/2 SATURATED STEAM ONLY. MAX TEMP 456°F (235°C) DRAIN AFTER USE

	I.D	O.D	W.P	W.P	BR	COIL LENGTH
						
Inch	mm	mm	BAR	PSI	mm	mt
1/2"	13	25	17	255	156	40
3/4"	19	31	17	255	228	40
1"	25	38	17	255	305	40
1 1/4"	32	46	17	255	384	40
1 1/2"	38	54	17	255	456	40
2"	51	67	17	255	610	40