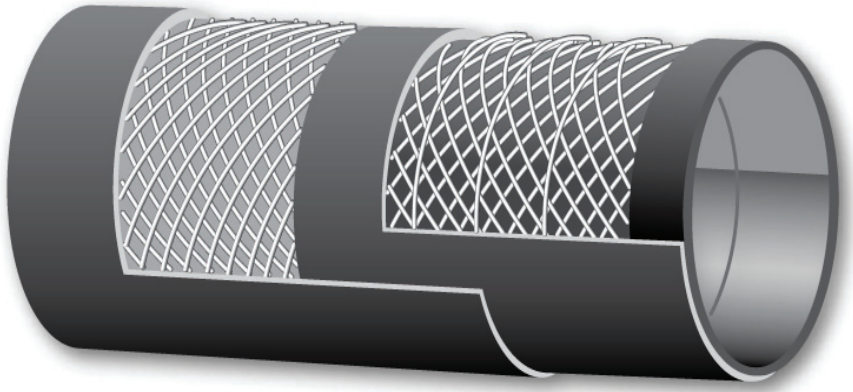


OSD - OIL SUCTION AND DELIVERY HOSE



TECHNICAL CHARACTERISTICS

SPECIFICATION: N/A

APPLICATION: Transfer of oil based products at up to 150 psi or for vacuum. Also suitable for use with SCR (Selective Catalytic Reduction) additives.

TUBE: NBR







REINFORCEMENT: Synthetic textile with two helix wires. Embedded with one antistatic (copper) wire.

COVER: CR / NBR Blended

TEMPERATURE RANGE: -40 degrees C to +90 degrees C

SAFETY FACTOR: 3:1

BRANDING: W=150 PSI (10 BAR) ID X OD OIL PETROLEUM SUCTION AND DELIVERY (red tape / black letters)

	I.D	O.D	W.P	W.P	BR	COIL LENGTH
						
Inch	mm	mm	BAR	PSI	mm	mt
3/4"	19	30	10	150	133	40
1"	25	35	10	150	178	40
1 1/4"	32	42	10	150	224	40
1 1/2"	38	48	10	150	226	40
1 3/4"	45	56	10	150	315	40
2"	51	62	10	150	356	40
2 1/4"	57	69	10	150	399	40
2 1/2"	63	78	10	150	455	40
3"	76	89	10	150	533	40
4"	102	117	10	150	813	40